

Delta


A special velour mat with a sustainable character

Also available with Pura Backing™

HydroTX™

ECONYL®


Type	Use	Traffic	Mat Matrix
Absorbent	Indoor	High	C

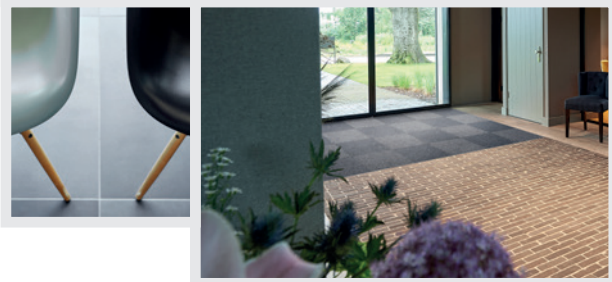

Delta is an absorbent entrance mat with a fine scraper fibre. Made of ECONYL® yarn, this high-traffic entrance mat contains HydroTX™ and is available with Pura Backing™.

Design

Delta is a somewhat thicker, crossover velour mat with a fine scraper fibre. Its varied, grainy texture blends easily with both hard and soft floor surface - such as wood, vinyl, carpet and ceramic tiles. The dark-grey, scraper fibres provide a restful background. The grey tone complements the dark metal of steel doors, anthracite window frames, etc. The mat's cool colour palette includes a business-like blue and two neutral greys - black and grey. While a warm colour palette offers three shades of brown - brown, taupe and sand - which go well with a variety of wood types. A more upbeat accent is also available - bright red.

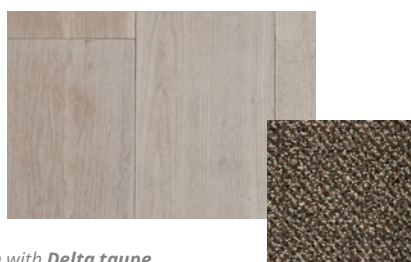


Wood light white wash with Delta taupe


Matching all floors

Our designers develop colourways that complement every interior style. For ambiances ranging from classic to modern design. The broad Rinos range always has the right solution, to complement both interior design and floor type. **Make your own combination on our website and be inspired by our options.**


Colours



Taupe
DE11
NCS: NCS S8005-Y20R




Brown
DE21
NCS: S8505-Y80R



Sand
DE31
NCS: S8005-Y50R



Black
DE51
NCS: S9000-N



Blue
DE61
NCS: S8505-R80B



Grey
DE81
NCS: S8502-B




Red
DE91
NCS: S5540-Y90R

Specifications

PVC

PURA^{BACKING}

Pile material	100% recycled (ECONYL®) Polyamide	100% recycled (ECONYL®) Polyamide
Pile weight ISO 8543	850 g/m ²	850 g/m ²
Use classification EN 1307	32	32
Flammability Euroclass EN 13501	Cfl-s1	Cfl-s1
Sizes rolls ***	135 cm/20 m ¹ , 200 cm/20 m ¹	135 cm/20 m ¹ , 200 cm/20 m ¹
Mat dimensions***	60*90 cm, 90*150 cm, 135*200 cm	60*90 cm, 90*150 cm, 135*200 cm
Backing	PVC	PU
Sand absorption class*	3	3
Optical class**	4	4
Absorption capacity TNO W6034	5,5	5,5
Total weight ISO 8543	ca. 3550 g/m ²	ca. 2950 g/m²
Pile height ISO 1766	ca. 6,0 mm	ca. 6,0 mm
Total height ISO 1765	ca. 8,0 mm	ca. 8,0 mm
Pile density ISO 8543	0,113 g/m ²	0,113 g/m ²
Number of stitches ISO 1763	ca. 74.500 /m ²	ca. 74.500 /m ²
Wearing class EN 1963	32	32
Comfort EN 1307	LC3	LC3
Dimensional stability ISO 2551	< 0,4%	< 0,4%
Light fastness ISO 105 B02	>6	>6
Water fastness ISO 105 B01	4-5	4-5
Rubbing fastness ISO 105 X12	4-5	4-5
Salt water ISO 105 E02	4	4
Shampoo BS 1006	4-5	4-5
Organic solvents ISO 105 X05	4	4
Static charge ISO 6356	< 2 KV	< 2 KV
Slip Resistance EN 13893	DS	DS
Yarn construction	cut pile	cut pile
Pattern	heathered	heathered
Colours	7	7
Suitability for stairs EN 1963	Intensive use	Intensive use
Suitability for castor chairs EN 985	Intensive use	Intensive use
Primary backing	nonwoven PES/PA	nonwoven PES/PA
Declaration of Performance	Available	Available

 Excluding loose-laid mats
EN 14061:2004

* Sand Absorption Class 3: >=90%, Sand Absorption Class 2: 80% =< class 2 < 90%, Sand Absorption Class 1: =< 80% ** Optical Class: 5 is best, 1 is lowest *** All listed dimensions include a PVC edge of 2.5 cm. The roll lengths are an indication. Delivered length can be up to 15% higher or lower. Installation and maintenance advice is available on our website.

PURA^{BACKING}

Pura Backing™ is a unique Rinos product innovation, developed by our R&D department. It's the Rinos answer to increasing demand for more environmentally friendly and sustainable entrance mat solutions by avoiding the use of PVC and plasticisers. Mats with Pura Backing™ meet this requirement - with zero PVC and plasticiser content, avoiding stains on porous subfloors. Thanks to increased flexibility, it is even easier to install!

Also available as tiles

Backing	Bitumen
Colours	Grey DE81, Taupe DE11
Total weight	3950 g/m ²
Total height	8 mm
Flammability EN 13501	Cfl-s1
Dimensional stability EN 986/ISO 2551	Passed (<0,2%)
Size	50*50 cm
Packaging	3 m ²

Contact us for more information

Our employees are ready to answer questions or to take your orders. **Call +31 38 385 35 00** or mail customerservice@rinos.com

Where to use?

	high traffic	medium traffic
Not combined with outdoor matting (scraping)	A	B
Combined with outdoor matting (absorbing)	C	D
Outdoor matting	E	

© Rinos B.V.

rinos.com/products/delta