
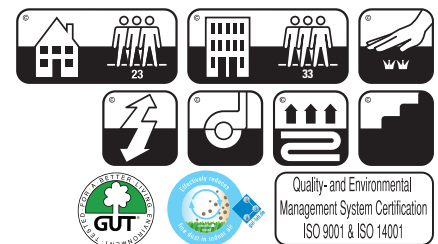


# Desso &Ex Nature .

Preliminary specification according to EN 1307

Type of manufacture	ISO 2424	Tufted 1/10 "						
Aspect	ISO 2424	Cut pile						
Dye method		Print						
Width		cm	400	ft	13.1			
Primary backing	ISO 2424	Polyester - polyamide fleece						
Secondary backing	ISO 2424	Polypropylene woven						
Pile fibre composition	ISO 2424	BCF Polyamide 6						
Total thickness	ISO 1765	mm	6.5	inch	0.3			
Effective pile thickness	ISO 1766	mm	4.3	inch	0.17			
Total mass	ISO 8543	g/m <sup>2</sup>	1930	oz/yd <sup>2</sup>	57.0			
Total pile mass	ISO 2424	g/m <sup>2</sup>	980	oz/yd <sup>2</sup>	28.9			
Effective pile mass	ISO 8543	g/m <sup>2</sup>	590	oz/yd <sup>2</sup>	17.4			
Pile density	ISO 8543	g/cm <sup>3</sup>	0.137	lb/in <sup>3</sup>	0.0050			
Number of tufts	ISO 1763	/dm <sup>2</sup>	1735	/yd <sup>2</sup>	145063			
Stroll test	ISO 6356	kV	≤ 2,0					
Vertical resistance	ISO 10965	Ohm	-					
Horizontal resistance	ISO 10965	Ohm	-					
Use classification	EN 1307	33 Commercial - heavy use						
Luxury rating	EN 1307	LC 2						
Impact sound reduction $\Delta L_w$	ISO 10140	dB	25					
Sound absorption	ISO 354	Freq. Hz	125	250	500	1000	2000	4000
		$\alpha_s$	0.00	0.05	0.10	0.20	0.40	0.55
Noise reduction	ISO 354	$\alpha_w$	0.20					
Thermal resistance	ISO 8302	m <sup>2</sup> .K/W	0.084					
Flammability	EN 13501-1	Cfl - s1 (glued tested)						
Prodis - GUT	www.pro-dis.info	26858B3D						

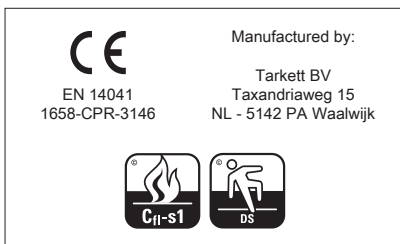

DESSO flooring products are to be installed in full accordance with Tarkett's installation instructions and recognized trade standards. An effective, regular cleaning and maintenance program is vital for retaining a high appearance level. DESSO flooring products should only be used as floorcoverings. Note: Tarkett reserves the right to change this specification without prior notice; changes are subject to normal production tolerances. For the latest versions of the technical specifications, visit [www.tarkett.com](http://www.tarkett.com)

EN-20220208